



KOMPACT TYPE 11

STANDARD PRODUCT RANGE

Other sizes are available* - special order only.

TYPE 11								
Code	Width (mm) (w)	Weight Kg/M	Water Content Lt/M	Output $\Delta T50^\circ$		Output $\Delta T60^\circ$		
				Watts	BTUs	Watts	BTUs	
S304K	400	3.79	0.68	209	714	268	914	
S305K	500	4.74	0.85	262	892	335	1143	
S306K	600	5.68	1.02	314	1071	402	1372	
S308K	800	7.58	1.36	366	1249	469	1600	
S310K	1000	9.47	1.70	523	1784	670	2286	
S312K	1200	11.36	2.04	628	2141	804	2743	
S314K	1400	13.26	2.38	732	2498	938	3201	
S316K	1600	15.15	2.72	837	2855	1072	3658	
S320K	2000	18.94	3.40	1046	3569	1340	4572	

300 Series
Height (h): 300mm

S404K	400	4.79	0.84	270	921	346	1180
S405K	500	5.99	1.05	337	1151	432	1475
S406K	600	7.18	1.26	405	1381	519	1769
S407K	700	8.38	1.47	472	1611	605	2064
S408K	800	9.58	1.68	540	1842	691	2359
S409K	900	10.77	1.89	607	2072	778	2654
S410K	1000	11.97	2.10	675	2302	864	2949
S411K	1100	13.17	2.31	742	2532	951	3244
S412K	1200	14.36	2.52	810	2762	1037	3539
S414K	1400	16.76	2.94	945	3223	1210	4129
S416K	1600	19.15	3.36	1079	3683	1383	4718
S418K	1800	21.55	3.78	1214	4144	1556	5308
S420K	2000	23.94	4.20	1349	4604	1729	5898
S422K	2200	26.33	4.62	1484	5064	1902	6488
S427K	2700	32.32	5.67	1822	6215	2334	7962
S430K	3000	35.91	6.30	2024	6906	2593	8847

400 Series
Height (h): 400mm

S504K	400	6.03	1.00	326	1114	418	1427
S505K	500	7.54	1.25	408	1392	523	1783
S506K	600	9.04	1.50	490	1670	627	2140
S507K	700	10.55	1.75	571	1949	732	2496
S508K	800	12.06	2.00	653	2227	836	2853
S509K	900	13.56	2.25	734	2505	941	3210
S510K	1000	15.07	2.50	816	2784	1045	3566
S511K	1100	16.58	2.75	897	3062	1150	3923
S512K	1200	18.08	3.00	979	3341	1254	4280
S513K	1300	19.59	3.25	1061	3619	1359	4636
S514K	1400	21.10	3.50	1142	3897	1463	4993
S515K	1500	22.61	3.75	1224	4176	1568	5349
S516K	1600	24.11	4.00	1305	4454	1672	5706
S518K	1800	27.13	4.50	1469	5011	1881	6419
S520K	2000	30.14	5.00	1632	5568	2090	7133
S522K	2200	33.15	5.50	1795	6124	2099	7846
S524K	2400	36.17	6.00	1958	6682	2508	8558
S527K	2700	40.69	6.75	2203	7516	2822	9629
S530K	3000	45.21	7.50	2448	8351	3136	10699

500 Series
Height (h): 500mm

TYPE 11								
Code	Width (mm) (w)	Weight Kg/M	Water Content Lt/M	Output $\Delta T50^\circ$		Output $\Delta T60^\circ$		
				Watts	BTUs	Watts	BTUs	
S604K	400	7.35	1.16	380	1296	487	1661	
S605K	500	9.19	1.45	475	1620	608	2076	
S606K	600	11.02	1.74	570	1944	730	2491	
S607K	700	12.86	2.03	665	2268	852	2906	
S608K	800	14.70	2.32	760	2592	973	3321	
S609K	900	16.53	2.61	855	2917	1095	3736	
S610K	1000	18.37	2.90	950	3241	1217	4152	
S611K	1100	20.21	3.19	1045	3565	1338	4567	
S612K	1200	22.04	3.48	1140	3889	1460	4982	
S613K	1300	23.88	3.77	1235	4213	1582	5397	
S614K	1400	25.72	4.06	1330	4537	1703	5812	
S615K	1500	27.56	4.35	1425	4861	1825	6227	
S616K	1600	29.39	4.64	1520	5185	1947	6642	
S618K	1800	33.07	5.22	1710	5833	2190	7473	
S620K	2000	36.74	5.80	1900	6481	2433	8303	
S622K	2200	40.41	6.38	2089	7129	2677	9133	
S624K	2400	44.09	6.96	2280	7778	2921	9965	
S627K	2700	49.60	7.83	2564	8750	3285	11209	
S630K	3000	55.11	8.70	2849	9722	3650	12455	

600 Series
Height (h): 600mm

S704K	400	8.40	1.20	430	1468	551	1880
S705K	500	10.50	1.50	538	1834	689	2350
S706K	600	12.60	1.80	645	2201	827	2820
S708K	800	16.80	2.40	860	2935	1102	3760
S710K	1000	21.00	3.00	1075	3669	1378	4700
S712K	1200	25.20	3.60	1290	4403	1653	5640
S714K	1400	29.40	4.20	1505	5136	1929	6580
S716K	1600	33.60	4.80	1720	5870	2204	7520
S718K	1800	37.80	5.40	1936	6604	2480	8460

750 Series
Height (h): 750mm


S904K	400	11.11	1.40	520	1773	666	2271
S905K	500	13.89	1.75	649	2216	832	2839
S906K	600	16.66	2.10	779	2659	998	3407
S907K	700	19.44	2.45	909	3102	1165	3974
S908K	800	22.22	2.80	1039	3545	1331	4542
S909K	900	24.99	3.15	1169	3989	1498	5110

900 Series
Height (h): 900mm

Heat output $\Delta T50^\circ C$ = mean water temperature of $70^\circ C$ and room temperature of $20^\circ C$.
Heat output $\Delta T60^\circ C$ = mean water temperature of $80^\circ C$ and room temperature $20^\circ C$.

*Other sizes are available in 100mm increments - special order only.

FITTING DIMENSIONS

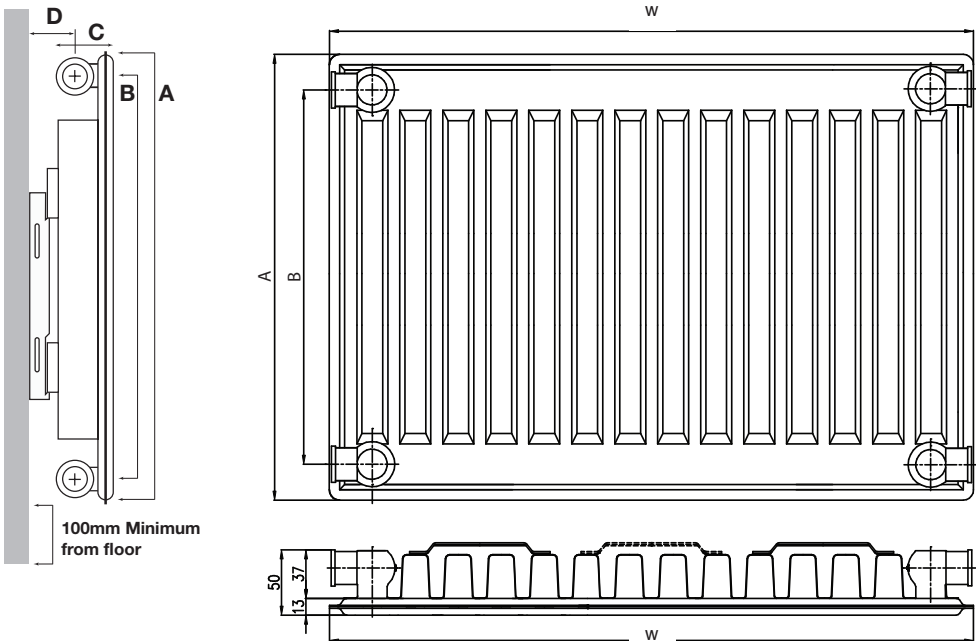

100mm Minimum from floor

Nominal Size (mm) (A)	Centre Distance (mm) (B)	Width (mm) (C)	Wall to Centre (mm) (D)
300	245	56	40 or 55
400	345	56	40 or 55
500	445	56	40 or 55
600	545	56	40 or 55
750	695	56	40 or 55
900	845	56	40 or 55

K-RAD BRACKET DETAILS

