

Installation Step


1






1.cutting the pipe at your required length


2






2.Slip the cap and insert it into the pipe

3

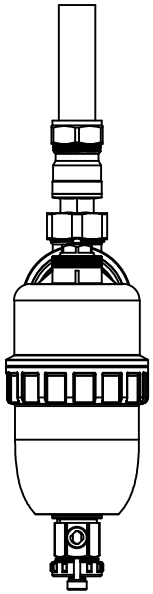


3.Slip the filter body onto pipe and slide down

4

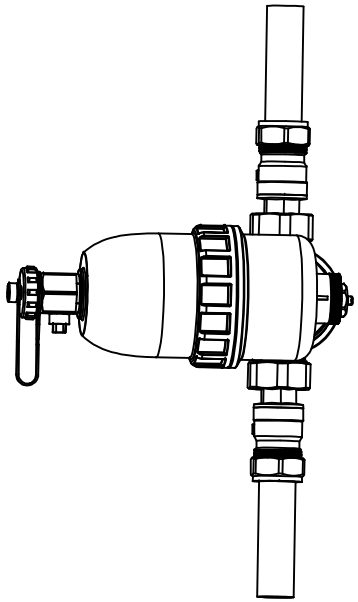


4.Once slide on turn filter body to right angle.

5

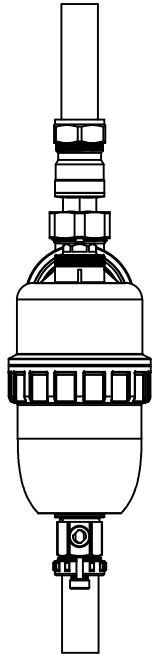


5.Straighten the filter body and tighten


Clean Step

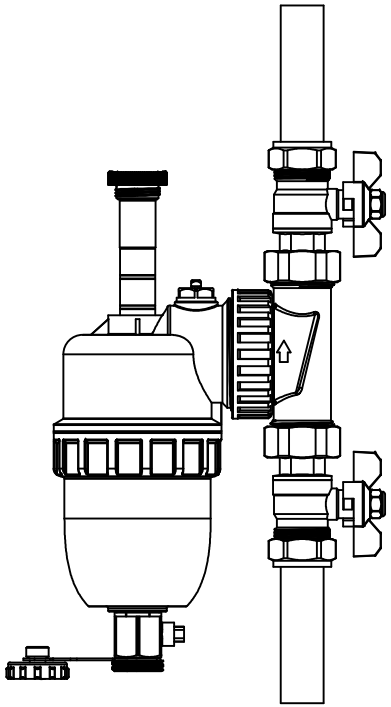

1.Remove magnetic bar from the filter body,
open the plug cap of the drain valve,
and then turn on the ball valves switch to clean the dirt.

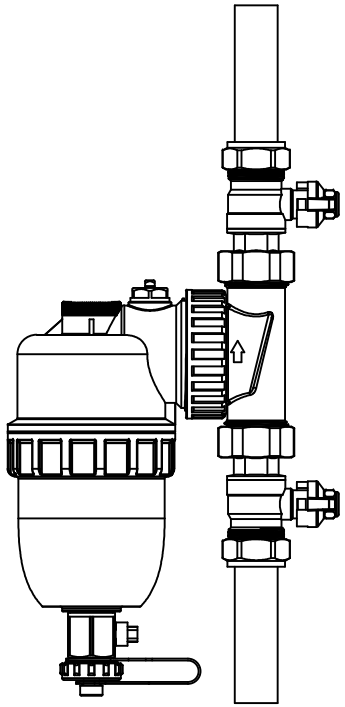

2. Close the ball valve switch,
screw the magnetic bar into the filter body and tighten it
and tighten the plug cap of the drain valve.

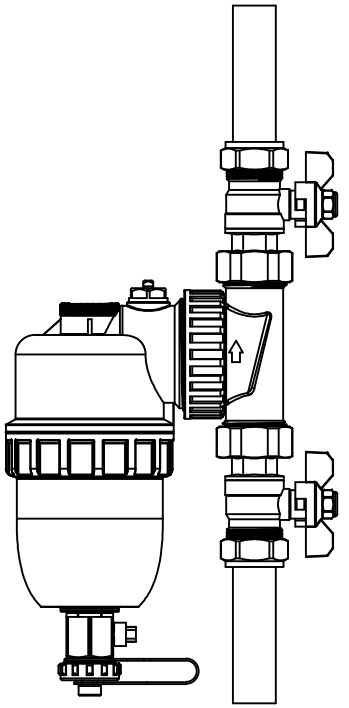

3.Turn on the ball valves switch