INSTALLATION INSTRUCTIONS

2. Positioning and Installation of Mirror Cabinet

① Attach the mirror cabinet to the bar as shown in Fig. 3, open the cabinet door, and mark on the wall （b2)with a pencil through the backplane hole (b1).

② Remove the mirror cabinet, drill the fixing hole in the wall in the marked position, and place the expansion plugs (Fig. 4).

③ Repeat the operation as shown in Fig. 3 and mount the mirror cabinet to the bar, and then tighten the screws on the backplane (Fig. 5).

④ Finally, turn on the main switch, and test if the switch works normally.

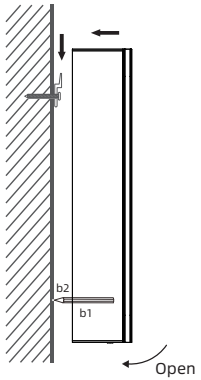


Fig. 3

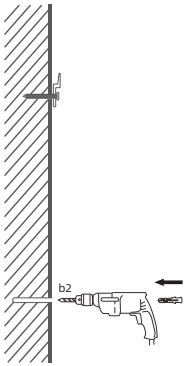


Fig. 4


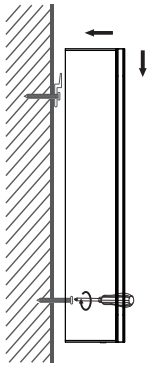



Fig. 5

Please Note


Products with an IR Sensor must be installed with a minimum of 200mm between the sensor and any solid object or reflective surface.




Wiring Diagram for Input

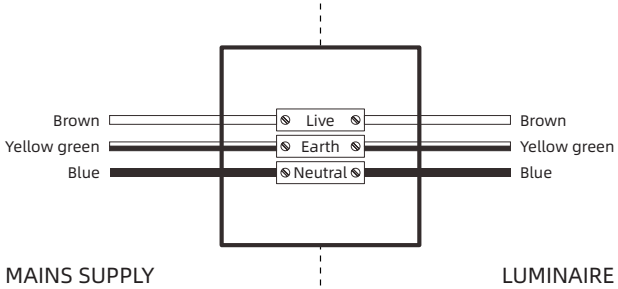

Schematic Diagram

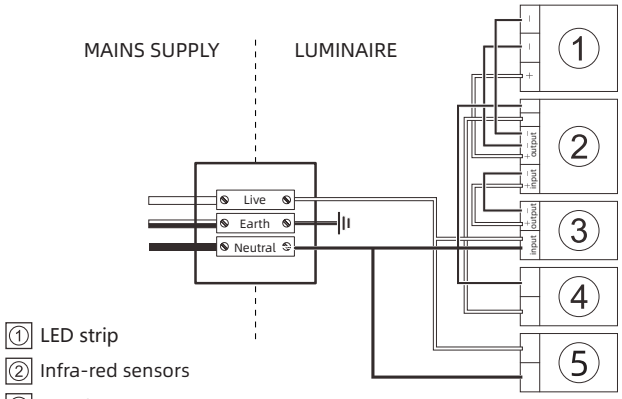


① LED strip
② Infra-red sensors
③ Supply power
④ Defogger pad
⑤ Shaver socket



Waste Electrical & Electronic Equipment Regulations (WEEE) requires that any of our products showing this mark (left) must not be disposed off with other household or commercial waste. We do not levy any WEEE disposal charges to its customers for affected WEEE related products. To prevent possible harm to the environment or human health from uncontrolled waste disposal, please separate any such product from other waste types and recycle it responsibly at your local facilities. Check with your Local Authority, Recycling Center or retailer for recycling advice.

REFLECTIONS BY K·VIT

INSTRUCTION MANUAL

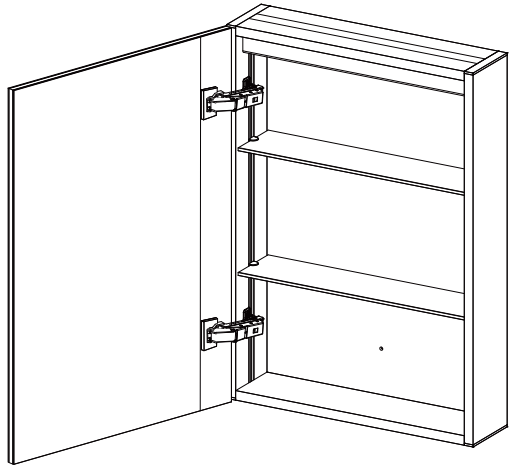

MODEL


MIR107

Note: This specification applies to Single door infrared induction switch LED Aluminum Cabinets

REFLECTIONS BY K·VIT
REFLECTIONS BY K·VIT
REFLECTIONS BY K·VIT


WALL MOUNTED MIRROR CABINET

Mirror Cabinet 500x700mm

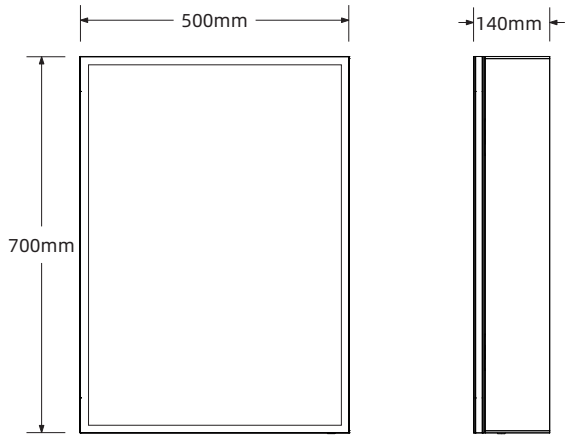

Front View


Side View



Bottom View

Technical details

- Adjustable stainless steel buffer hinge
- Double layer adjustable tempered glass shelf
- Infrared sensor switch
- Aluminum alloy cabinet
- Double-sided copper-free silver mirror

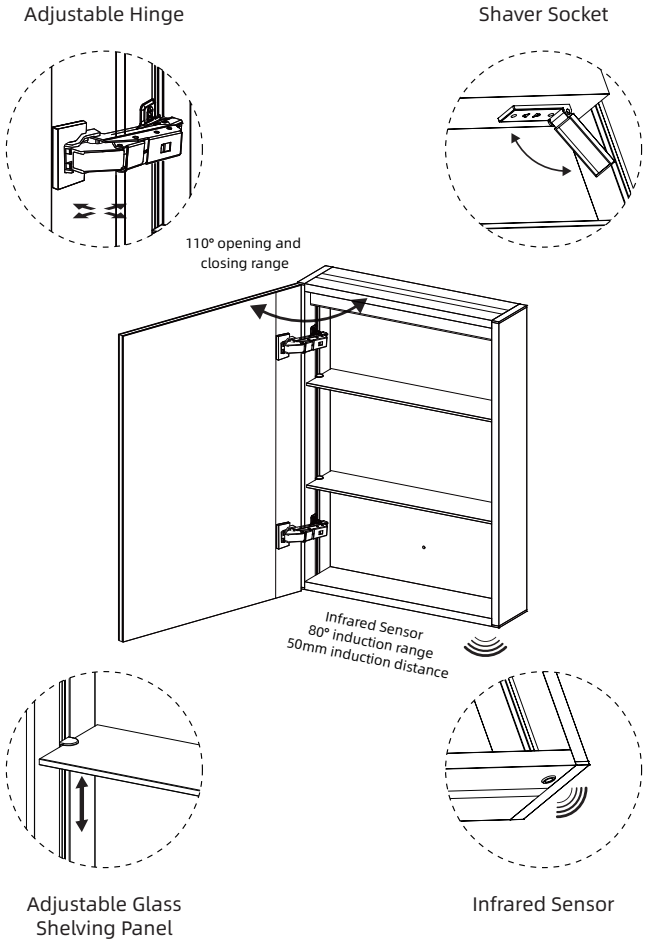


Please Note

1. Before installing the product,please carefully read the instructions and operate accordingly.
2. Before installing,please turn off the main power switch and ensure that it won't turn on.
3. The installation of this product requires that the staff has some electrical knowledge.
4. This mirror cabinet is heavy;do not lift or install with single person in order to avoid injury.
5. Before installing,please check whether the product is broken,to avoid injury caused by damaged glass.
6. Do not clean the product surface with acid and alkaline cleaning agent;please use a damp cloth.
7. In case of functional failure of the product,users are not allowed to disassemble and repair without authorization, otherwise,our company will not be responsible for any safety accidents.

INSTALLATION INSTRUCTIONS

Packing List

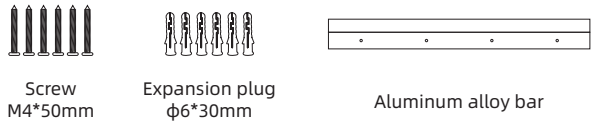


Screw M4*50mm

Expansion plug ϕ6*30mm

Aluminum alloy bar

Required Tools



Flexible rule | Drill | Spirit level | Hammer | Pencil | Screwdriver

Installation Steup

1. Fixing the bar

① Open the product packaging, and check whether the product has any exception or functional damage; if yes, please return it to the dealer.

② After selecting the location of the mirror cabinet, check whether the wall is solid, measure the distance of the holes (a1,a2,a3) in the aluminum alloy bar with a tape measure and mark the wall with a level and pencil (Fig. 1).

③ Drill holes in the marked position with electric drill and ϕ4 drill bit, and use special ceramic drill if the wall surface is ceramic tile.

④ Knock the expansion plugs into the holes in the wall with a hammer, and then tighten the screws with a screwdriver to fix the bar, and calibrate the level with a spirit level (Fig. 2).




Fig.1




Fig.2