



KOMPACT TYPE 21

STANDARD PRODUCT RANGE

Other sizes are available* - special order only.

TYPE 21								
Code	Width (mm) (w)	Weight Kg/M	Water Content Lt/M	Output $\Delta T50^\circ$		Output $\Delta T60^\circ$		
				Watts	BTUs	Watts	BTUs	
P404K	400	7.60	1.67	413	1408	529	1803	
P405K	500	9.50	2.09	516	1759	661	2254	
P406K	600	11.39	2.50	619	2111	793	2705	
P407K	700	13.29	2.92	722	2463	925	3156	
P408K	800	15.19	3.34	825	2815	1057	3607	
P409K	900	17.09	3.75	928	3167	1189	4057	
P410K	1000	18.99	4.17	1031	3519	1321	4508	
P411K	1100	20.89	4.59	1134	3871	1453	4959	
P412K	1200	22.79	5.00	1238	4223	1586	5410	
P414K	1400	26.59	5.84	1444	4927	1850	6311	
P416K	1600	30.38	6.67	1650	5630	2114	7213	
P418K	1800	34.18	7.51	1856	6334	2378	8115	
P420K	2000	37.98	8.34	2063	7038	2643	9016	
P422K	2200	41.78	9.17	2269	7742	2907	9918	

400 Series
Height (h): 400mm

P504K	400	9.27	1.97	493	1682	631	2154
P505K	500	11.59	2.47	616	2102	789	2693
P506K	600	13.90	2.96	739	2523	947	3232
P507K	700	16.22	3.45	863	2943	1105	3770
P508K	800	18.54	3.94	986	3363	1263	4309
P509K	900	20.85	4.44	1109	3784	1421	4847
P510K	1000	23.17	4.93	1232	4204	1579	5386
P511K	1100	25.49	5.42	1355	4625	1736	5925
P512K	1200	27.80	5.92	1479	5045	1894	6463
P514K	1400	32.44	6.90	1725	5886	2210	7540
P516K	1600	37.07	7.89	1972	6727	2526	8618
P518K	1800	41.71	8.87	2218	7568	2841	9695
P520K	2000	46.34	9.86	2464	8408	3157	10772
P522K	2200	50.97	10.85	2711	9249	3473	11849

500 Series
Height (h): 500mm

TYPE 21								
Code	Width (mm) (w)	Weight Kg/M	Water Content Lt/M	Output $\Delta T50^\circ$		Output $\Delta T60^\circ$		
				Watts	BTUs	Watts	BTUs	
P604K	400	11.43	2.28	566	1932	725	2474	
P605K	500	14.29	2.85	708	2414	907	3093	
P606K	600	17.14	3.42	849	2897	1088	3712	
P607K	700	20.00	3.99	991	3380	1269	4330	
P608K	800	22.86	4.56	1132	3863	1450	4949	
P609K	900	25.71	5.13	1274	4346	1632	5568	
P610K	1000	28.57	5.70	1415	4829	1813	6186	
P611K	1100	31.43	6.27	1557	5312	1994	6805	
P612K	1200	34.28	6.84	1698	5795	2176	7423	
P613K	1300	37.14	7.41	1840	6277	2357	8042	
P614K	1400	40.00	7.98	1981	6760	2538	8661	
P615K	1500	42.86	8.55	2123	7243	2720	9279	
P616K	1600	45.71	9.12	2264	7726	2901	9898	
P618K	1800	51.43	10.26	2547	8692	3264	11135	
P620K	2000	57.14	11.40	2830	9658	3626	12372	
P622K	2200	62.85	12.54	3114	10623	3989	13610	

600 Series
Height (h): 600mm

P704K	400	14.40	2.68	650	2216	832	2839
P705K	500	18.00	3.35	812	2771	1040	3549
P706K	600	21.60	4.02	974	3325	1248	4259
P708K	800	28.80	5.36	1299	4433	1664	5679
P710K	1000	36.00	6.70	1624	5541	2081	7099

750 Series
Height (h): 750mm


P904K	400	16.99	3.08	752	2567	964	3289
P905K	500	21.24	3.85	941	3209	1205	4111
P906K	600	25.48	4.62	1129	3851	1446	4934
P907K	700	29.73	5.39	1317	4493	1687	5756
P908K	800	33.98	6.16	1505	5135	1928	6578
P909K	900	38.22	6.93	1693	5777	2169	7400

900 Series
Height (h): 900mm

Heat output $\Delta T50^\circ\text{C}$ = mean water temperature of 70°C and room temperature of 20°C .
Heat output $\Delta T60^\circ\text{C}$ = mean water temperature of 80°C and room temperature of 20°C .

*Other sizes are available in 100mm increments - special order only.

FITTING DIMENSIONS

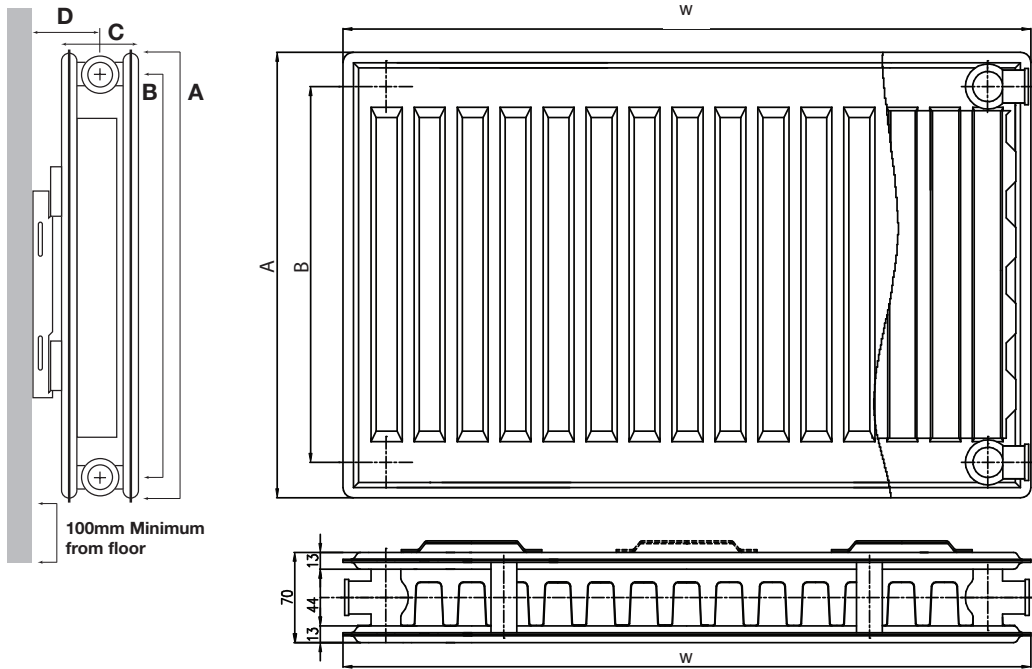

Nominal Size (mm) (A)	Centre Distance (mm) (B)	Width (mm) (C)	Wall to Centre (mm) (D)
300	245	70	65 or 80
400	345	70	65 or 80
500	445	70	65 or 80
600	545	70	65 or 80
750	695	70	65 or 80
900	845	70	65 or 80

K-RAD BRACKET DETAILS

